

# ACP-4340

## 4U Rackmount Chassis for Full-size SHB/SBC or ATX/MicroATX Motherboard with 4 Hot Swap Drive Trays



### Features

- Supports a PICMG backplane with up to 14 slots or an ATX/Micro-ATX motherboard
- Shock-resistant disk drive bay holds four hot-swap 3.5" and 2.5" SATA disk trays, one slim optical disk drive, and one 2.5" internal drive
- Dual front USB 3.0 ports
- Front-accessible system fan without opening top cover for easy maintenance
- LED indicators and alarm notification for system fault detection
- Built-in Intelligent System Module enabling whole system fan control and remote manageability


### Quiet Specifications

CE FCC


		External	Internal
Drive Bay	Slim Optical Drive Bay	1	-
	3.5"	-	-
	2.5"	-	1
	Hot Swap (SATA only)	4 (Compatible with both 3.5" or 2.5" devices, no convert bracket needed)	-
Cooling	Fan	1 (12 cm PWM fan /82 CFM) + 1 (8 cm DC fan /52 CFM) for SATA storage unit	
	Air Filter	Yes	
Front I/O Interface	USB 3.0*	2	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2	
	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub and one 25-pin D-Sub openings	
System Monitoring		Chassis intrusion switch	
Intelligent System Module Hardware Monitoring	CPU/System fan speed, CPU/system temperature (Only Advantech AIMB-78X, PCE-51XX/71XX mainboards can enable CPU fan speed and temperature monitoring function of Intelligent System Module)		
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	
	Shock	10 G (with 11 ms duration, half sine wave)	
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7.0" x 18.8")	
	Weight	12.5 kg (27.5 lb)	

The USB 3.0 ports do not operate if the motherboard has no on-board USB 3.0 box header.

### Front View

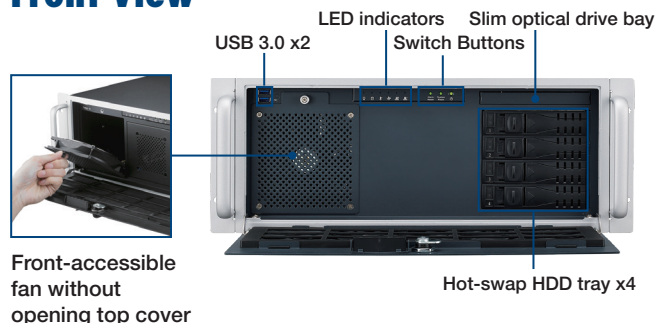

### Inside View

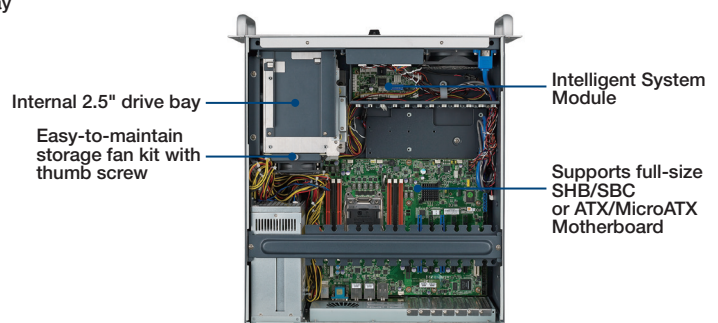


### Rear View



\*Note: Backplane, SBC, motherboard, and power supply are not included.

## Dimensions

Unit: mm [inch]

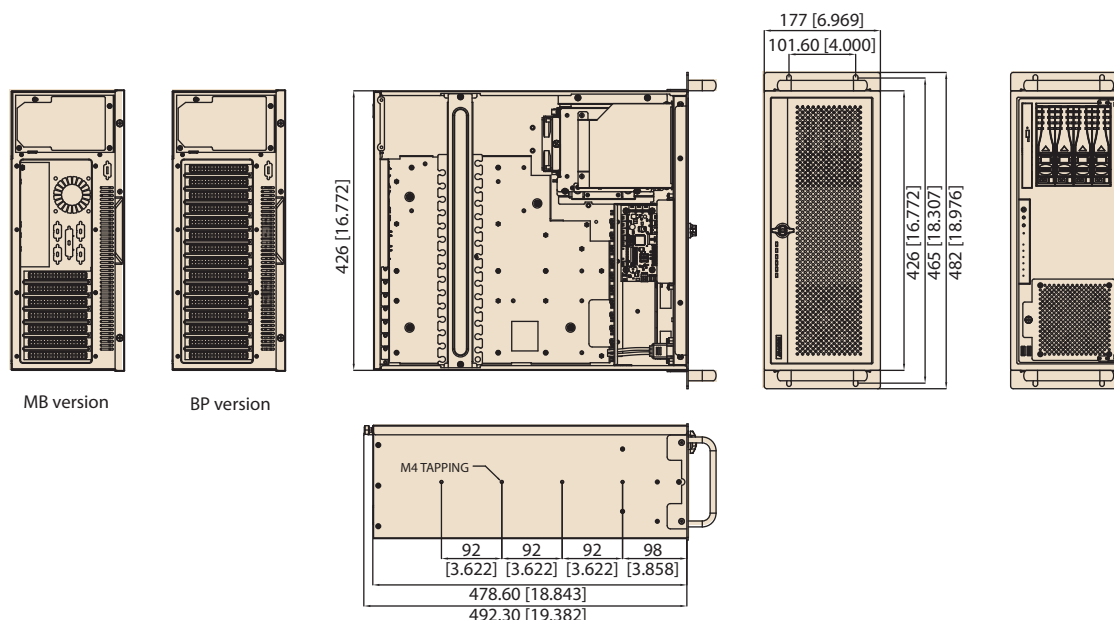

## Ordering Information

Part Number	Power supply	Power supply type	Wattage	80 plus grade	Switch type
<b>Backplane Version</b>					
ACP-4340BP-50B	PS8-500ATX-BB	Single	500W	Bronze	ATX
ACP-4340BP-50RB	RPS8-500ATX-GB	1+1 redundant	500W	Gold	ATX
<b>Motherboard Version</b>					
ACP-4340MB-50B	PS8-500ATX-BB	Single	500W	Bronze	ATX
ACP-4340MB-70B	PS8-700ATX-BB	Single	700W	Bronze	ATX
ACP-4340MB-50RB	RPS8-500ATX-GB	1+1 redundant	500W	Gold	ATX
<b>DC power supply Version</b>					
ACP-4340MB-50DB	96PS-D500WPS2	Single	500W	Bronze	ATX
ACP-4340MB-50RDB	96PSR-D500WMIN	1+1 redundant	500W	Bronze	ATX

## Packing List

Part Number	Description	Quantity
ACP-4340	4U chassis with handle set	1
1750008561-01	system fan	1
1750006808-01	Hot-swap module fan	1
1700030260-01	system fan cable (MB version)	1
1700019426	Hot-swap module fan cable (MB version)	1
1700029691-01	system fan cable (BP version)	1
1703030254	Hot-swap module fan cable (BP version)	1
98R2132000E	Hot-swap tray	4
1990021256T000	Door filter	1
1960002462	key set	1
<b>Content of Accessory Box</b>		
98R24340000	Handle set	1
	Screws/nuts and rubber for motherboard and devices	one bag
2006434001	User manual	1

## Optional Accessories

Part Number	Description
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)
1700029268-01	Power cable for GPU card (Two 4-pin 12V connectors to one 6+2 pins PCIe power connector)
1700024754-01	Power cable for GPU card (Two B4P Molex connectors to one 6+2 pins PCIe power connector)

\* If GPU card with 2 power connectors, please use 1700029268-01\*1 + 1700024754-01\*1; If GPU card with 1 power connector, please use 1700029268-01.

\* Only 500W or higher wattage PSU support 1700029268-01 and 1700024754-01 for high-end GPU card.